

07/06/00
U.S. PRO

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</small>	Attorney Docket No.	678-504(P9383)
	First Inventor or Application Identifier	Ki-Hyun KIM
	Title	AUTOMATICALLY CLOSABLE...
	Express Mail Label No.	EL484187060US

APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents.</small>		ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231	
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) <small>(Submit an original and a duplicate for fee processing)</small>	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)		
2. <input checked="" type="checkbox"/> Specification [Total Pages 12] <small>(preferred arrangement set forth below)</small> - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure	6. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission <small>(if applicable, all necessary)</small> a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies		
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 12] 4. Oath or Declaration [Total Pages <input]<br="" type="checkbox"/> a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) <small>(for continuation/divisional with Box 16 completed)</small> i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	ACCOMPANYING APPLICATION PARTS 7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement <input type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small> 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <small>(Should be specifically itemized)</small> * Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired (PTO/SB/09-12) 13. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 14. <input type="checkbox"/> Other: <input checked="" type="checkbox"/> Check for \$690.00(filing fee)		

*** NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____
 Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS <input type="checkbox"/> Customer Number or Bar Code Label <input checked="" type="checkbox"/> Correspondence address below <small>(Insert Customer No. or Attach bar code label here)</small>					
Name	Paul J. Farrell, Esq.				
Address	Dilworth & Barrese 333 Earle Ovington Blvd.				
City	Uniondale	State	NY	Zip Code	11553
Country	U.S.	Telephone	(516) 228-8484	Fax	(516) 228-8516

Name (Print/Type)	Paul J. Farrell, Esq.	Registration No. (Attorney/Agent)	33,494
Signature	<i>Paul J. Farrell</i>	Date	7/6/00

CERTIFICATION UNDER 37 C.F.R. § 1.10 I hereby certify that this correspondence and the documents referred to as enclosed are being deposited with the United States Postal Service on date below in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL484187060US addressed to: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

Dated: 7/6/00

Michael J. Musella
Michael J. Musella

07-07-00

A

PATENT

Atty. Docket No. 678-504 (P9383)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Assistant Commissioner for Patents
Washington, D.C. 20231

UTILITY APPLICATION FEE TRANSMITTAL

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Ki-Hyun KIM and Kwang-Ho JEONG


For: AUTOMATICALLY CLOSABLE MOBILE TELEPHONE

Enclosed are:

- [x] 9 page(s) of specification
- [x] 1 page(s) of Abstract
- [x] 2 page(s) of claims
- [x] 12 sheets of drawings [x] formal [] informal
- [] _____ page(s) of Declaration and Power of Attorney
- [] An Assignment of the invention to _____

CERTIFICATION UNDER 37 C.F.R. §1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date July 6, 2000 an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL484187060US addressed to: Assistant Commissioner of Patents and Trademarks, Washington, D.C. 20231.


Michael J. Musella

☒ Certified copy of application

Country	Appln. No.	Filed
KOREA	99-27131	July 6, 1999

from which priority under Title 35 United States Code, §119 is claimed

☐ is enclosed.

☒ will follow.

CALCULATION OF UTILITY APPLICATION FEE

For	Number Filed	Number Extra	Rate	Basic Fee
Total				\$690.00
Claims*	7 - 20 =	0	x \$ 18.00	\$.00
Independent				
Claims	1 - 3 =	0	x \$ 78.00	\$.00
Multiple	<input type="checkbox"/> yes	Add'l. Fee	\$260.00	\$
Dependent				
Claims	<input checked="" type="checkbox"/> no	Add'l. Fee	None	= \$.00
TOTAL				\$ 690.00

☐ Verified Statement of "Small Entity" Status Under 37 C.F.R. §1.27. Reduced fees under 37 C.F.R. § 1.9(f) (50% of total) paid herewith \$_____.

☐ The amount of \$40.00 for recording the attached Assignment is included in the enclosed check.


☒ A check in the amount of \$690.00 to cover the ☐ recording, ☒ filing fee(s) is attached.

*Includes all independent and single dependent claims and all claims referred to in multiple claims. See 37 C.F.R. § 1.75(c).

[] Charge fee to Deposit Account No. 04-1121. Order No. _____
TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

[X] Please charge any deficiency as well as any other fee(s) which may become due under 37 C.F.R. § 1.16 and 1.17, at any time during the pendency of this application, or credit any overpayment of such fee(s) to Deposit Account No. 04-1121. Also, in the event any extensions of time for responding are required for the pending application(s), please treat this paper as a petition to extend the time as required and charge Deposit Account No. 04-1121 therefor. TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

Date: July 6, 2000



Signature of Attorney
Paul J. Farrell
Reg. No. 33,494
Attorney for Applicant

DILWORTH & BARRESE
333 Earle Ovington Blvd.
Uniondale, NY 11553
Tel. No. (516) 228-8484
Fax. No. (516) 228-8516

PJF/MM:mg

AUTOMATICALLY CLOSABLE MOBILE TELEPHONE**PRIORITY**

5 This application claims priority to an application entitled "Automatically Closable Mobile Telephone" filed in the Korean Industrial Property Office on July 6, 1999 and assigned Serial No. 99-27131, the contents of which are hereby incorporated by reference.

BACKGROUND OF THE INVENTION**1. Field of the Invention**

15 The present invention relates generally to a mobile telephone, and in particular, to an automatically closable mobile telephone in which a sub-body (flip or a folder) for protecting a keypad or an LCD (Liquid Crystal Display) can be automatically opened and closed against a main body by a simple switching operation by a user.

2. Description of the Related Art

20 Currently, mobile telephones are becoming increasingly smaller in size and support multiple functions to meet the user's various demands. Thus, the speaker, earpiece, flip cover, folder and keypad of the mobile telephone are also smaller in size but still support the multiple functions.

25 FIG. 1 shows a general flip-type mobile telephone, which is a typical manually closable mobile telephone.

Referring to FIG. 1, the flip-type mobile telephone is comprised of a main body

100, a flip cover (or sub-body) 200 and a hinge device (not shown) for mechanically opening the flip cover 200 at a specific angle. The sub-body may also include a folder cover for a folder-type telephone.

5 The main body 100 is comprised of an upper casing frame 101, a lower casing frame 102, and an antenna device 103 mounted at one side of an upper end thereof. Further, the main body 100 includes an earpiece 104 placed at an upper side thereof, a display 105 placed at a lower side of the earpiece 104, and a keypad 106 with multiple key buttons, mounted at a lower side thereof. In addition, the main body 100 includes a
10 microphone 107 for converting a voice signal to an electric signal, which is mounted at a lower side of the keypad 106.

 The flip cover 200 for protecting the keypad on the main body and concentrating a voice on the microphone is mounted by the hinge device such that the flip cover may be
15 freely opened and closed against the main body. For a telephone conversation, the user opens the flip cover by hand, which is very inconvenient especially if he or she has other things to do, for example, while driving.

 Although not shown, the folder-type mobile telephone also has the same
20 problem.

SUMMARY OF THE INVENTION

 It is, therefore, an object of the present invention to provide an opening/closing
25 device for automatically opening and closing a flip or a folder of a mobile telephone by a simple switching operation by the user.

 To achieve the above and other objects, there is provided a closable mobile telephone including a main body and a sub-body closably mounted on the main body.

The mobile telephone includes an opening/closing device installed in the main body, for automatically opening and closing the sub-body against the main body; a switch conveniently located on the main body, for driving the opening/closing device; a detector for detecting an opening angle of the opening/closing device; and a controller for controlling rotation of the opening/closing device at a predetermined opening angle by analyzing an output of the detector.

According to a preferred embodiment of the present invention, the opening/closing device includes a hollow module housing with a through hole formed at one end thereof; a decelerating module fixedly inserted in the module housing; and a sub-body coupler fixed to an end of a driving module of the decelerating module, a part of the sub-body coupler projecting from the through hole of the module housing and being fixed to a side of the sub-body. The decelerating module includes a driving motor; and a decelerating device coupled to the driving motor, for reducing the number of rotations and increasing a driving force of the driving motor.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

FIG. 1 is a perspective view illustrating a general flip-type mobile telephone;

FIG. 2 is a perspective view illustrating an opening/closing device according to an embodiment of the present invention in a disassembled state;

FIG. 3 is a perspective view illustrating the opening/closing device in an assembled state;

FIG. 4 is a cross-sectional view illustrating a decelerating module of the opening/closing device according to an embodiment of the present invention;

FIG. 5 is a cross-sectional view taken on line A-A' of FIG. 4;

FIG. 6 is a partial exploded perspective view illustrating a flip cover and a main body of the telephone to which the opening/closing device according to the present invention is applied;

FIG. 7 is a partial cross-sectional view illustrating a state where the flip cover is assembled in the main body;

FIG. 8 is a perspective view of a mobile telephone including a switch for opening/closing the flip cover according to an embodiment of the present invention;

FIG. 9 is a perspective view illustrating a mobile telephone with a photo-sensor according to an embodiment of the present invention;

FIG. 10 is a perspective view illustrating a folder-type mobile telephone according to an embodiment of the present invention;

FIG. 11 is a partial exploded perspective view illustrating a folder and a main body with the opening/closing device according the present invention; and

FIG. 12 is a cross-sectional view illustrating a state where the folder of FIG. 11 is assembled in the main body.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

A preferred embodiment of the present invention will be described herein below with reference to the accompanying drawings. In the following description, well-known functions or constructions are not described in detail since they would obscure the invention in unnecessary detail.

An automatically closable mobile telephone according to an embodiment of the present invention is comprised of an opening/closing device assembled in a main body, for opening and closing a sub-body against the main body; a switch conveniently located on the main body, for driving the opening/closing device; a detector for detecting a driving angle of the opening/closing device; and a controller for controlling an opening angle of the opening/closing device depending on the output of the detector.

FIG. 2 shows an opening/closing device according to an embodiment of the present invention in a disassembled state. FIG. 3 shows the opening/closing device in an assembled state. Referring to FIGS. 2 and 3, an opening/closing device 10 includes a hollow module housing 11 with a through hole 12 formed at an end thereof, a decelerating module 40 fixedly inserted in the module housing 11, and a sub-body coupler 53 fixed to an end of a driving shaft 50 of the decelerating module 40. A part of the sub-body coupler 53 projects from the through hole 12 of the module housing 11 and is fixed to the sub-body. The sub-body coupler 53 is rounded and has flat surfaces 53a so that it may rotate together with the sub-body when coupled to the sub-body. In addition, a stopping projection 54 is formed along a circumference of the sub-body coupler 53 so that the sub-body coupler 53 may not escape from the through hole 12 of the module housing 11.

FIG. 4 is a cross-sectional view illustrating a decelerating module of the opening/closing device according to an embodiment of the present invention. FIG. 5 is a cross-sectional view taken on line A-A' of FIG. 4.

Referring to FIGS. 4 and 5, the decelerating module 40 of the opening/closing device 10 is comprised of a cylindrical module housing 41, a driving motor 42 with a spur gear 42a coupled to its shaft at one side of the module housing 41, a guide gear 43 with teeth formed on the inner circumference of the module housing 41, at least two spur gears 44 each engaged with both the teeth of the guide gear 43 and the spur gear 42a of the driving motor 42, each of the spur gears 44 having a self-rotatable shaft 48, and a rotary plate 49 rotatably mounted on ends of the shafts 48. The rotary plate 49 is fixed to the driving shaft 50 at the center of the upper surface thereof.

In a preferred embodiment of the present invention, there are provided 3 spur gears 44 which are engaged with both the teeth of the guide gear 43 and the spur gear

42a. When the spur gear 42a of the driving motor 42 rotates, the spur gears 44 self-rotate while revolving around the driving shaft 50 along the inner circumference of the guide gear 43 in the rotating direction of the driving motor 42.

5 Further, in order to increase a driving force of the driving shaft 50, at least two spur gears 46 may be coaxially formed on the shafts 48 in a multi-layer structure using a spacer 45. In this case, there is provided an idle gear 47 which is simultaneously engaged with the multi-layered spur gears 46 to assist the spur gears 46 in revolving along the inner circumference of the guide gear 43.

10 Since one end of each of the shafts 48 is rotatably connected to the rotary plate 49, if the spur gear 42a of the driving motor 42 rotates, the spur gears 44 engaged with it will revolve around the guide gear 43, so that the revolving spur gears 44 and shafts 48 will rotate the rotary plate 49. When the rotary plate 49 rotates, the driving shaft 50 rotates which is fixed to the upper central surface of the rotary plate 49 by an E-ring 51. At this point, the driving shaft 50 will have a reduced rotation number and increased driving force, as compared with the driving motor 42.

15 FIG. 6 is a partial exploded perspective view illustrating how to assemble a flip in a main body to which the opening/closing device according to the present invention is applied. FIG. 7 is a partial cross-sectional view illustrating a state where the flip is assembled in the main body.

20 Referring to FIGS. 6 and 7, the opening/closing device 10 is installed within a hinge arm 108 on the upper casing frame 101 of the main body 100. The sub-body coupler 53 of the opening/closing device 10 is installed such that a part of the sub-body coupler 53 projects from the hinge arm 108. Thus, the projected sub-body coupler 53 is coupled to a coupling member 201a formed in a socket 201 of the flip 200 so that they can rotate together.

When the sub-body (i.e., flip cover) 200 is assembled in the main body 100 such that the sub-body can be automatically opened and closed, there is required a detector for detecting an open state of the sub-body 200 to control a proper opening angle. For the
5 detector, a lead switch for detecting a magnetic force or a photo-sensor can be typically used.

FIG. 8 is a perspective view of a mobile telephone including a switch for opening/closing the flip cover according to an embodiment of the present invention.

Referring to FIG. 8, the mobile telephone includes a lead switch 21 installed within the lower side of the main body 100. Further, a switch 30 for driving the opening/closing device 10 is located on the main body 100. Alternatively, it is also possible to implement the switching means for driving the opening/closing device 10 by
10 operating (or pressing) specific key buttons on the keypad 106. A magnet 22 is attached to an inner surface of the flip cover 200 at a position corresponding to the lead switch 21.

Therefore, when the user presses the switch 30 on the main body 100, the opening/closing device 10 starts opening the flip cover 200 and continues to a
15 predetermined angle. In the initial opening state, the lead switch 21 is still under the influence of the magnet 22 on the flip cover 200, so that the lead switch 21 is turned OFF. In the meantime, if the opening/closing device 10 continuously operates to open the flip cover 200, the device reaches a point where the lead switch 21 is no longer influenced by the magnet 22 on the flip cover 200, so that the lead switch 21 is turned ON. A controller
20 (not shown) in the main body 100 can control the opening angle of the opening/closing device 10 by analyzing a signal output from the lead switch 21 when it is turned ON.

Meanwhile, if the user presses the switch 30 again in order to close the flip cover 200 which is now opened to the predetermined angle (e.g., 135°), the opening/closing

device 10 starts closing the flip cover 200. The controller analyzes a time point when the lead switch 21 on the main body 100 is again under the influence of the magnet 22 on the flip cover 200, to stop operation of the opening/closing device 10 when the flip cover 200 is completely closed.

5

FIG. 9 shows a mobile telephone with a photo-sensor according to another embodiment of the present invention. Referring to FIG. 9, when the user presses the switch 30 on the main body 100, the opening/closing device 10 starts opening the flip cover 200 to a predetermined angle. In this state, a photo-sensor 23 detects an open state of the flip cover 200 and the controller controls the opening/closing device 10 based on the time point when the photo-sensor 23 detects the open state, so as to open the flip cover 200 at a proper opening angle.

10

Meanwhile, if the user presses the switch 30 again in order to close the flip cover 200 which was opened to the predetermined angle, the opening/closing device 10 starts closing the flip cover 200. The controller analyzes a time point when the photo-sensor 23 detects a closed state of the flip cover 200, to stop operation of the opening/closing device 10 when the flip cover 200 is completely closed.

15

The opening/closing device according to an embodiment of the present invention can also be applied to a folder-type mobile telephone.

20

FIG. 10 is a perspective view illustrating a folder-type mobile telephone with the opening/closing device according to an embodiment of the present invention. FIG. 11 is a partial perspective view illustrating how to assemble a folder in a main body with the opening/closing device according the present invention. FIG. 12 is a cross-sectional view illustrating a state where the folder of FIG. 11 is assembled in the main body.

25

Referring to FIGS. 10 to 12, a folder-type mobile telephone is comprised of a

main body 1000 and a folder 2000. The main body 1000 includes a keypad 1020 and a microphone 1030, and the folder 2000 includes an earpiece 2010 and an LCD 2020. The opening/closing device 10 is installed within a hinge arm 2030 of the folder 2000 such that a part of the sub-body coupler 53 should project from a through hole formed at one side of the hinge arm 2030. The sub-body coupler 53 of the opening/closing device 10 is coupled to a coupling hole 1011 formed on a combining member 1010 of the main body 1000, so that the folder (i.e., sub-body) 2000 can be opened and closed against the main body 1000. Further, a switch 30 for automatically opening and closing the folder 2000 against the main body 1000 is located on one side of the main body 1000.

Similarly, the folder-type mobile telephone also includes a detector for detecting an opening angle of the folder 2000 when it is opened and closed by operation of the switch 30, and a controller for opening the folder 2000 at a proper opening angle by analyzing an output of the detector.

For the detector, the lead switch or the photo-sensor can be typically used, as stated above. In addition, the opening/closing device according to the present invention can also be applied to a flip-up-type mobile telephone.

It can be appreciated from the foregoing description that the user can automatically open and close the sub-body against the main body by simply operating the switch. Therefore, the user can open and close the mobile telephone using one hand.

While the invention has been shown and described with reference to a certain preferred embodiment thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

WHAT IS CLAIMED IS:

1. A mobile telephone including a main body and a sub-body closably mounted on the main body, comprising:

5 an opening/closing device installed in the main body, for automatically opening and closing the sub-body against the main body;

a switch for driving the opening/closing device;

a detector for detecting an opening angle of the opening/closing device; and

10 a controller for controlling rotation of the opening/closing device to a predetermined opening angle by analyzing an output of the detector.

2. The mobile telephone as claimed in claim 1, wherein the opening/closing device comprises:

a hollow module housing with a through hole formed at one end thereof;

15 a decelerating module fixedly inserted in the module housing; and

a sub-body coupler fixed to an end of a driving module of the decelerating module, a part of the sub-body coupler projecting from the through hole of the module housing and being fixed to a side of the sub-body.

20 3. The mobile telephone as claimed in claim 2, wherein the decelerating module comprises:

a driving motor; and

a decelerating device coupled to the driving motor, for reducing the number of rotations and increasing a driving force of the driving motor.

25 4. The mobile telephone as claimed in claim 1, wherein the detector includes a lead switch which is turned on and off according to opening and closing of the sub-body by detecting a magnet mounted on the sub-body.

5. The mobile telephone as claimed in claim 1, wherein the detector includes a photo-sensor which is turned on and off according to opening and closing of the sub-body.

5 6. The mobile telephone as claimed in claim 1, wherein the sub-body is a flip cover.

7. The mobile telephone as claimed in claim 1, wherein the sub-body is a folder.

ABSTRACT OF THE DISCLOSURE

A mobile telephone having a main body and a sub-body closably mounted on the main body. The mobile telephone includes an opening/closing device installed in the main body, for automatically opening and closing the sub-body against the main body; a switch located at a specific place on the main body, for driving the opening/closing device; a detector for detecting an opening angle of the opening/closing device; and a controller for controlling rotation of the opening/closing device to a predetermined opening angle by analyzing an output of the detector.

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Ki-Hyun KIM et al.

Docket: 678-504

Serial No.: [not yet assigned]

Date: July 6, 2000

Filed: July 6, 2000

For: AUTOMATICALLY CLOSABLE MOBILE
TELEPHONE

Assistant Commissioner for Patents
Washington, D.C. 20231

TRANSMITTAL OF FORMAL DRAWINGS

Sir:

Applicants transmit herewith twelve (12) sheets of formal drawings including
Figs. 1-12 for the above-identified patent application.

Respectfully submitted,




Paul J. Farrell
Registration No. 33,494
Attorney for Applicants

DILWORTH & BARRESE
333 Earle Ovington Boulevard
Uniondale, New York 11553
(516) 228-8484

PJF/MM:mg

CERTIFICATION UNDER 37 C.F.R. §1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date July 6, 2000 an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL484187060US addressed to: Assistant Commissioner of Patents and Trademarks, Washington, D.C. 20231.


Michael J. Musella

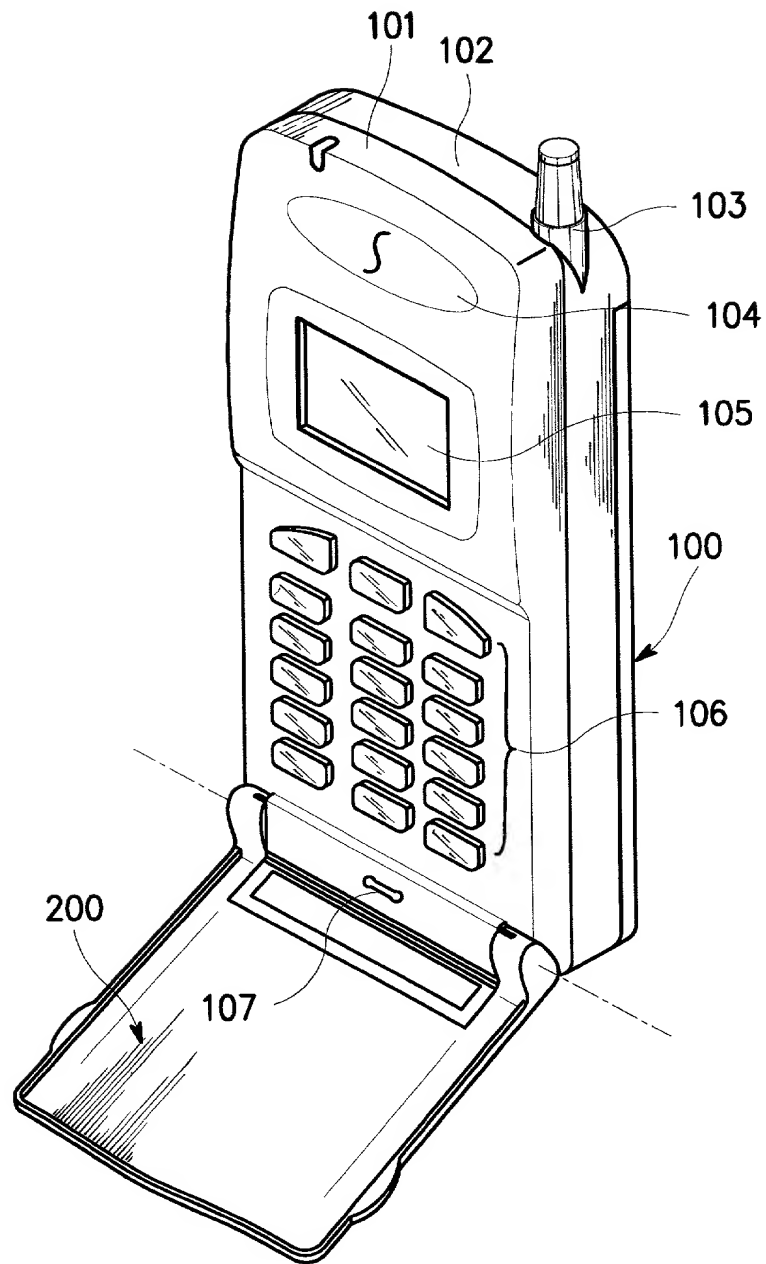
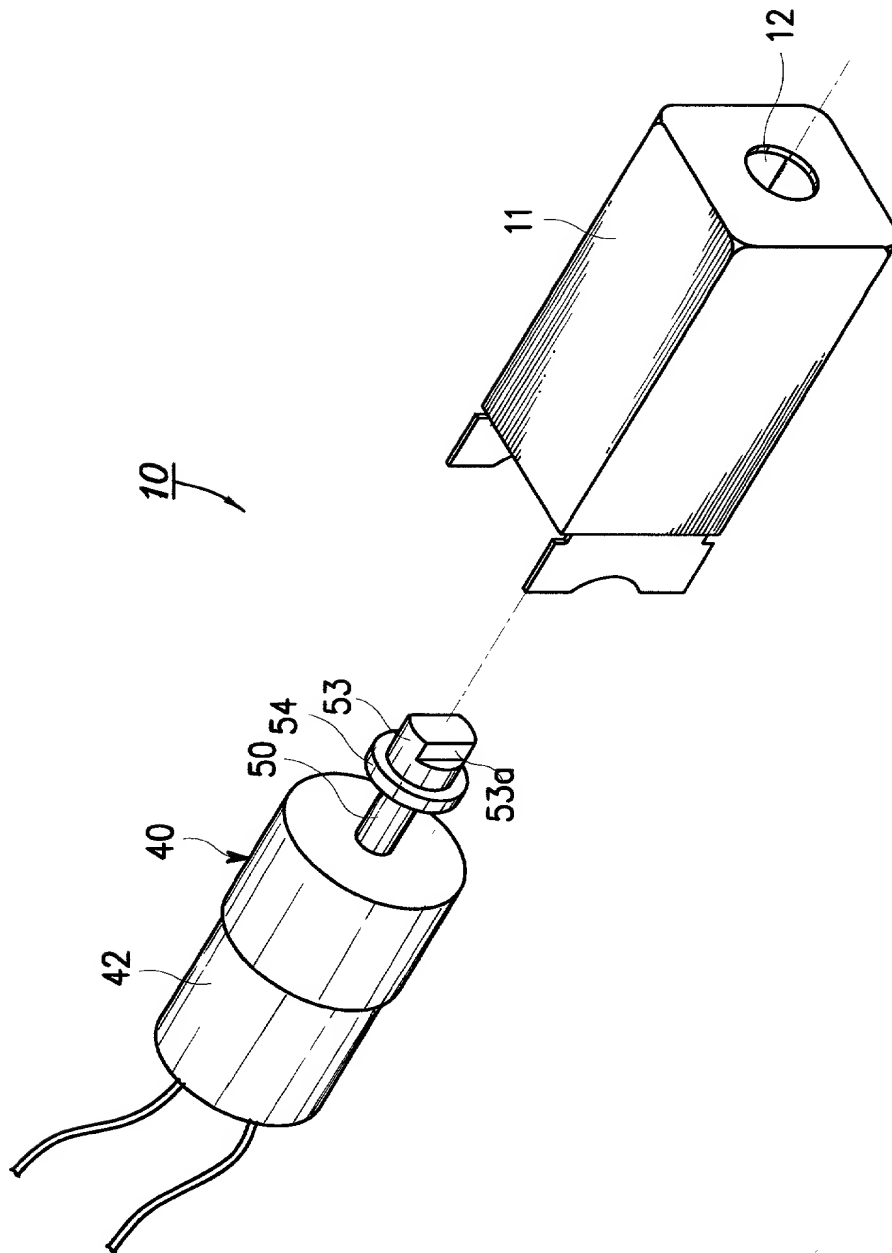


FIG. 1

FIG. 2



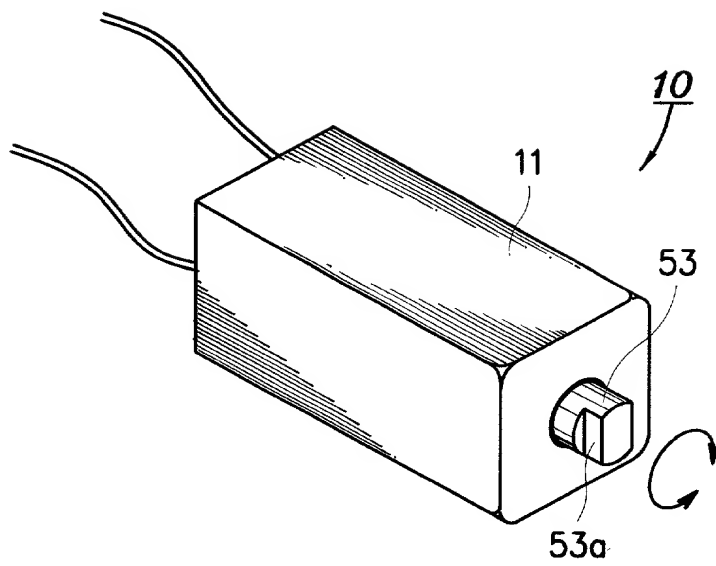


FIG. 3

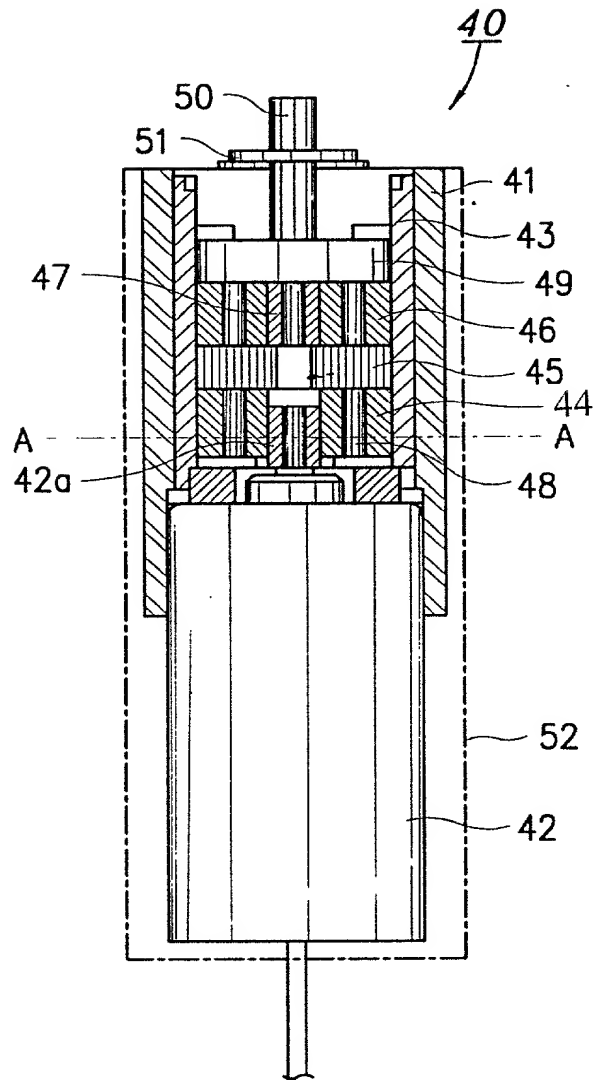


FIG. 4

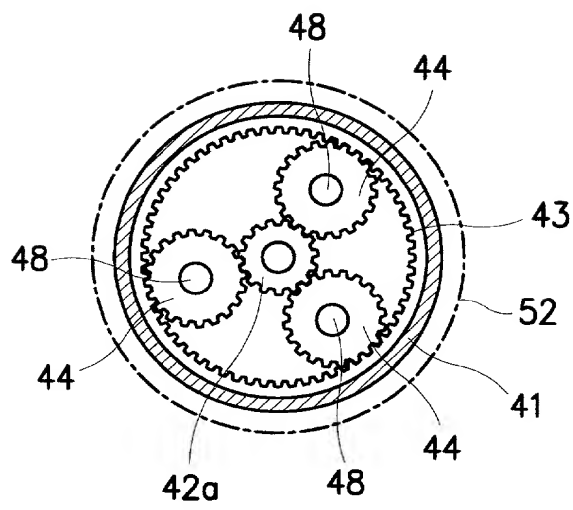


FIG. 5

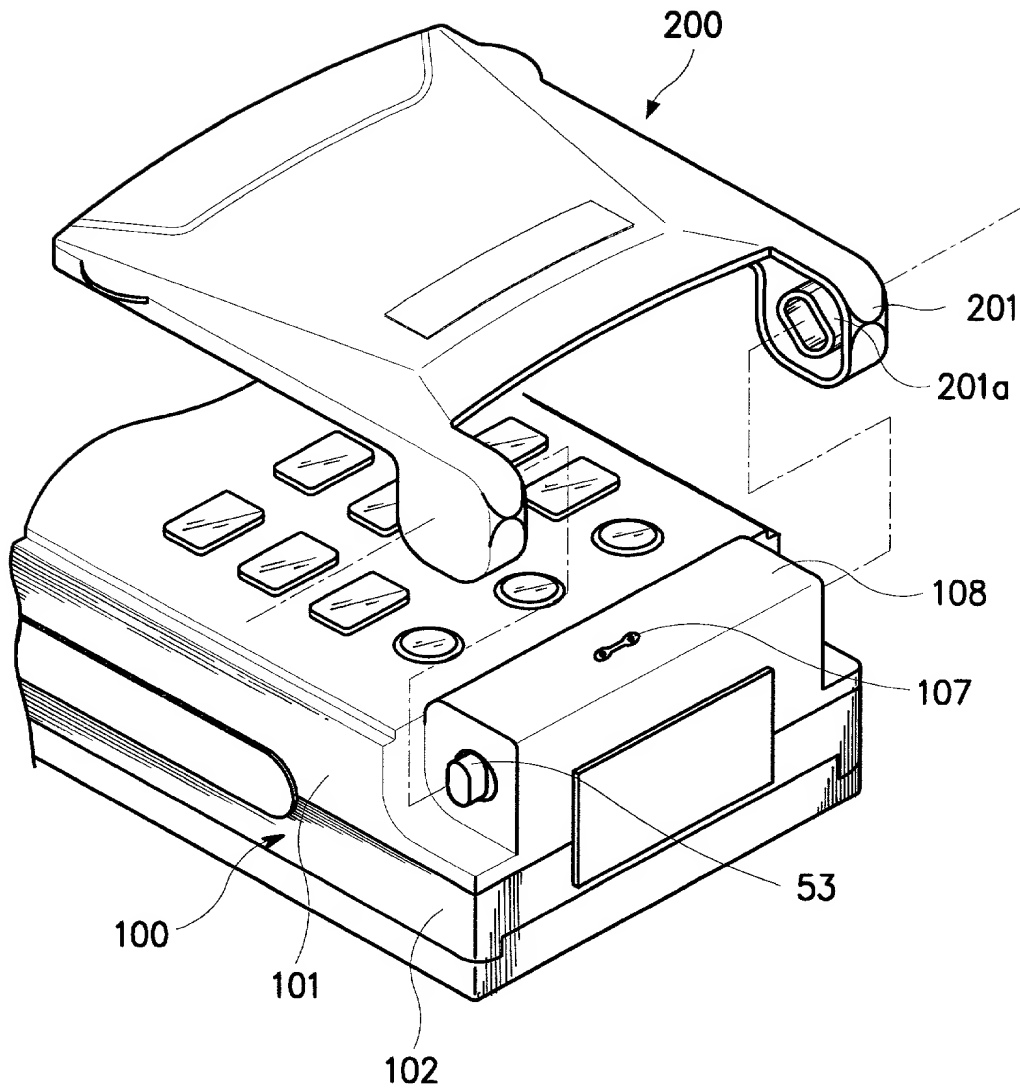


FIG. 6

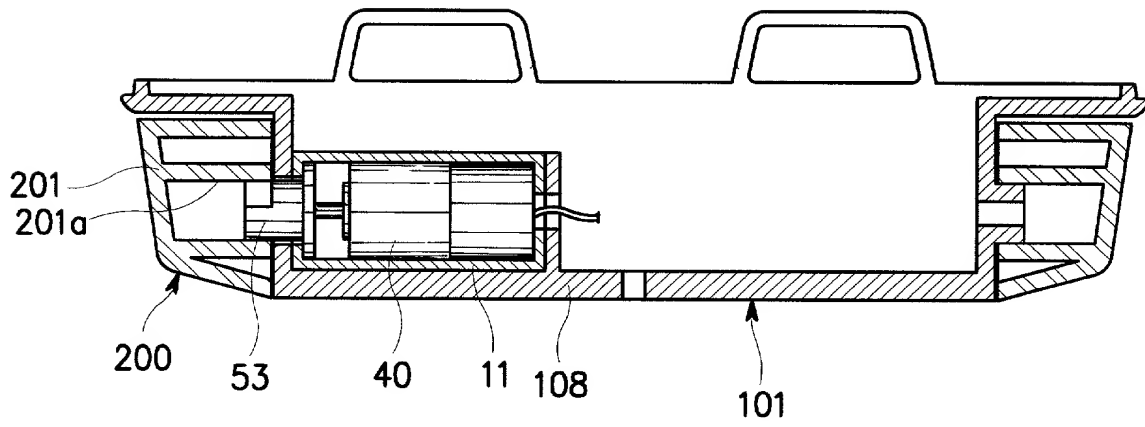


FIG. 7

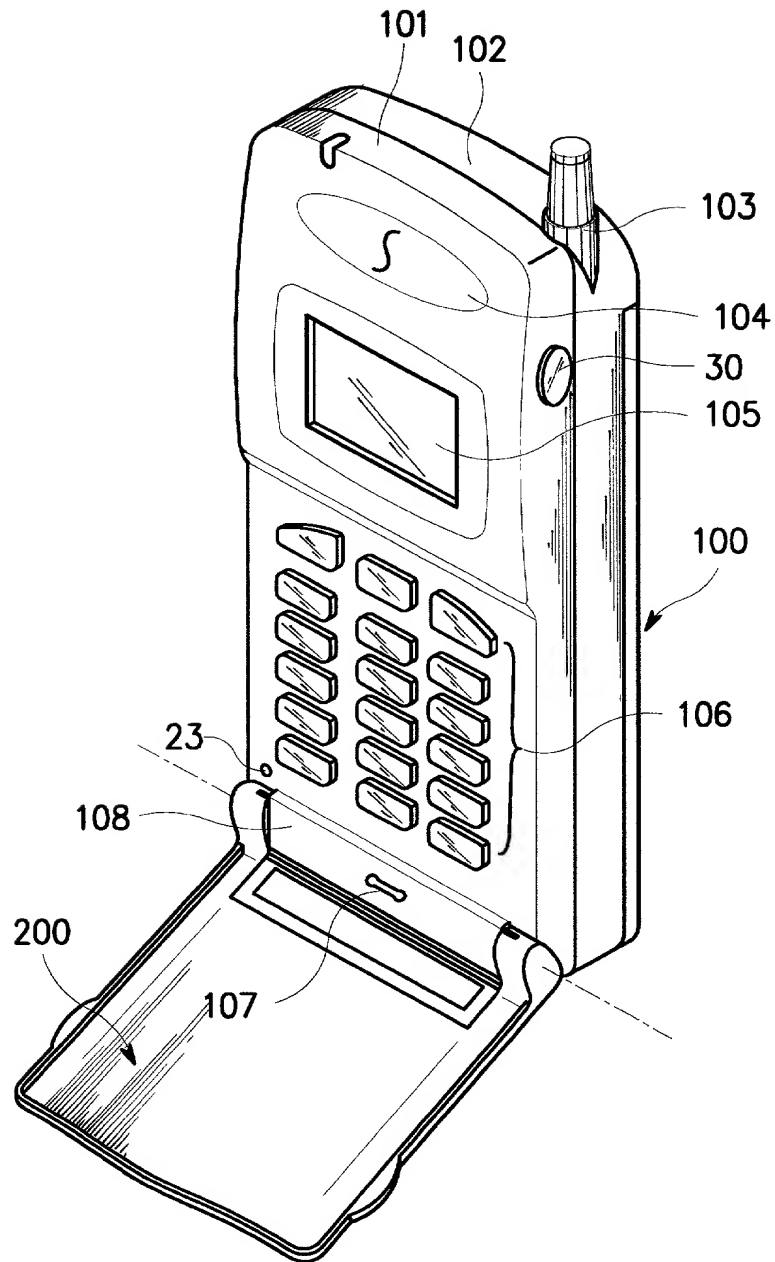


FIG. 9

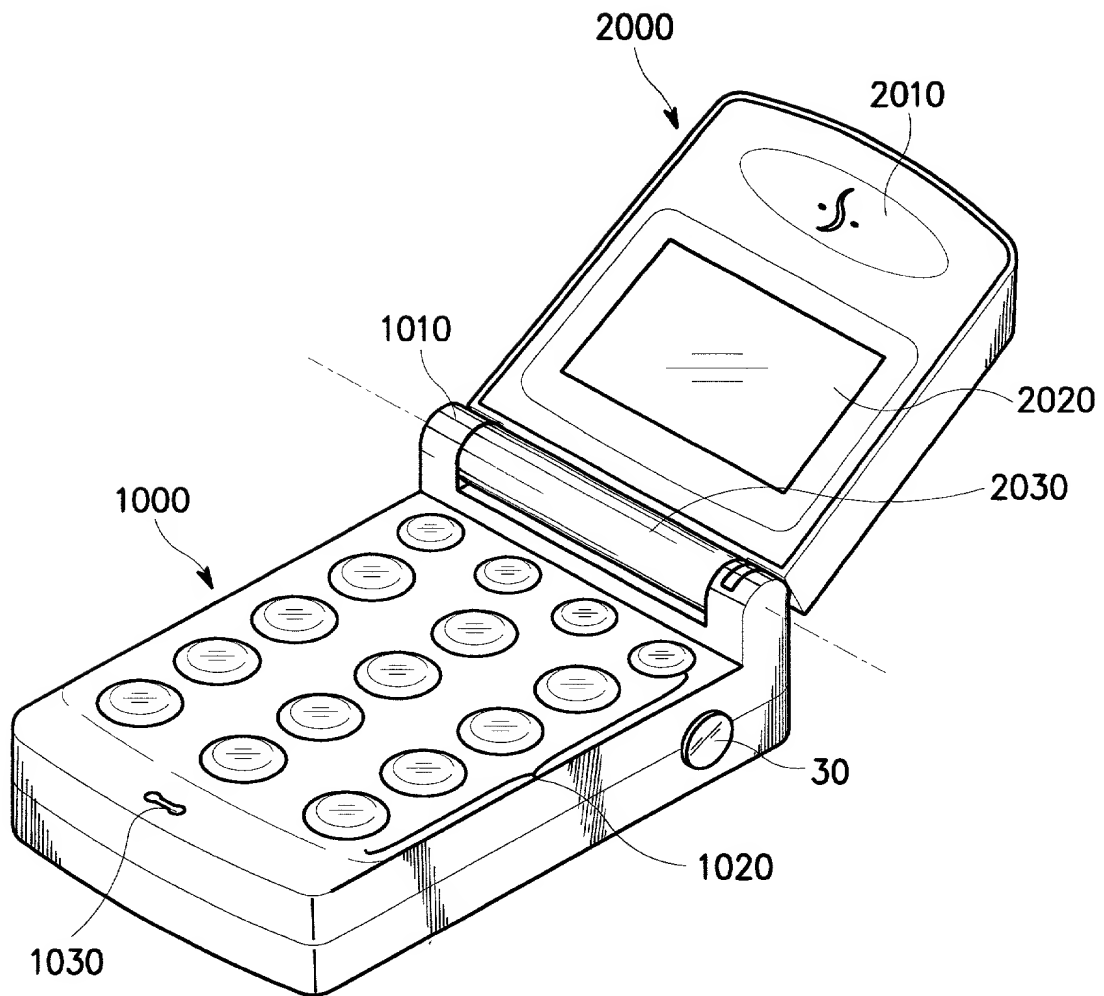


FIG. 10

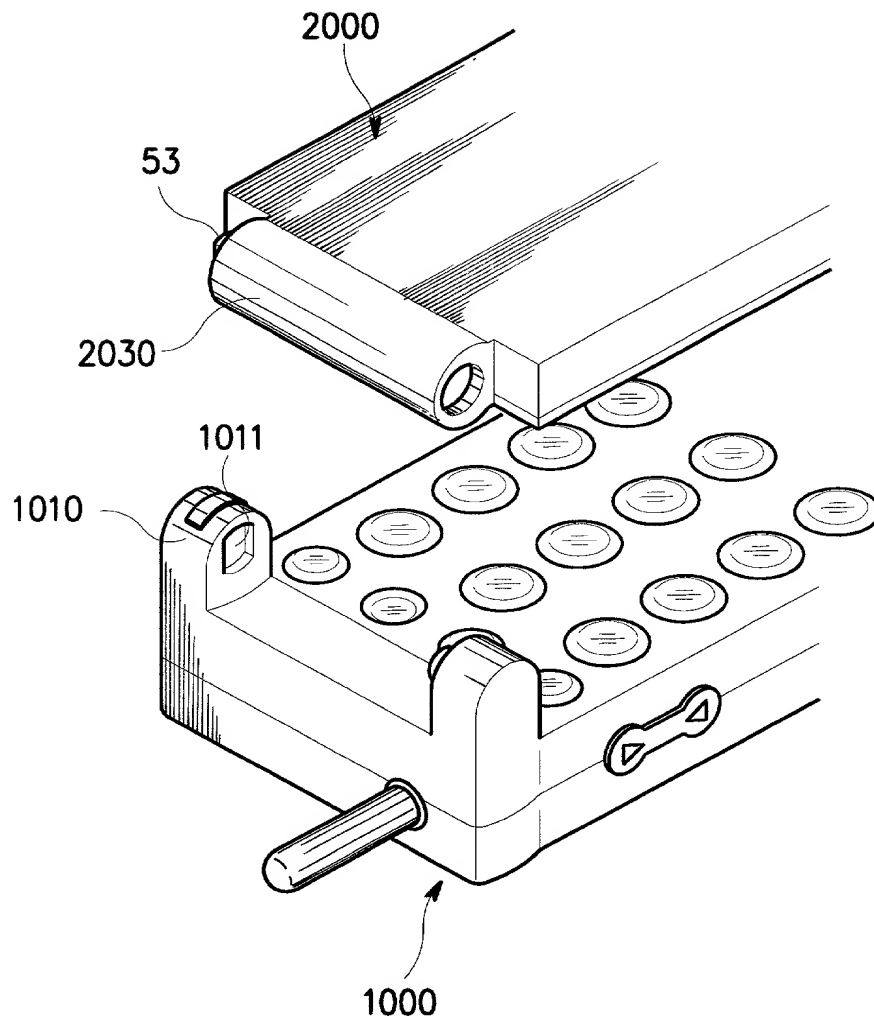


FIG. 11

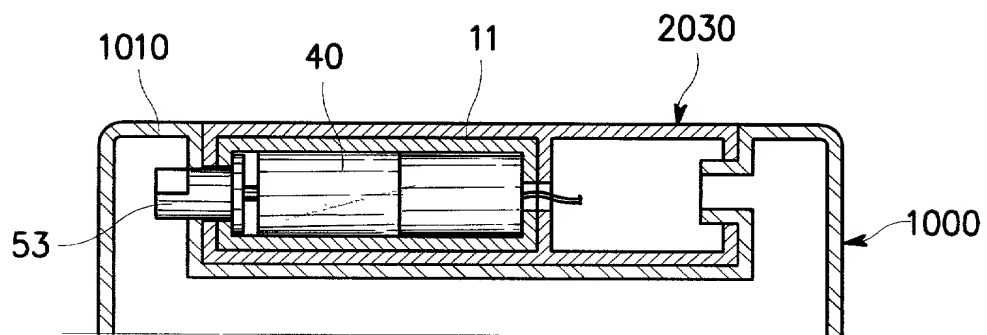


FIG. 12